


1 STOREY BUILDING WITH FULL BASEMENT

SHINGLES: TYPE _____
 SHEATHING: TYPE _____ THICKNESS _____

RAFTERS: SIZE _____ SPACING _____ SPAN _____
 CEILING JOIST: SIZE _____ SPACING _____ SPAN _____


MANUFACTURED TRUSSES:
 MANUFACTURER _____

INSULATION: MINIMUM REQUIRED R-50
 VAPOUR BARRIER: TYPE _____
 INTERIOR CEILING FINISH: TYPE _____

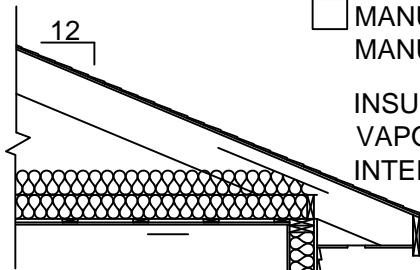

SIDING: TYPE _____
 SHEATHING MEMBRANE: TYPE _____
 SHEATHING: TYPE _____ THICKNESS _____
 WALL STUDS: HEIGHT _____ SIZE _____
 INSULATION: MINIMUM REQUIRED R-24
 VAPOUR BARRIER: TYPE _____
 INSIDE WALL FINISH: TYPE _____

BEAM: SIZE _____ THICKNESS _____
 LENGTH _____ HEIGHT _____
 POST: SIZE _____ HEIGHT _____
 FOOTING (MIN 4 sq.ft.): HEIGHT _____
 WIDTH _____



FLOOR JOIST: SIZE _____ SPACING _____ SPAN _____
 SILL GASKET REQUIRED
 ANCHOR BOLTS 1/2" @ _____ O.C. (MAX 8FT, 2.4M)
 INSULATION OF RIM JOIST: MINIMUM REQUIRED R-24

SLAB THICKNESS: _____
 VAPOUR BARRIER: TYPE _____
 FILL MATERIAL: TYPE _____

FOUNDATION WALL: THICKNESS _____ HEIGHT _____
 DAMPROOFING: YES NO
 HEIGHT OF BACKFILL MATERIAL: _____
 FOOTING: HEIGHT _____ WIDTH _____
 6" MIN. CRUSHED STONE (REQUIRED)
 4" MIN. PERFERATED DRAIN TILE (REQUIRED)
 INSULATION: MINIMUM REQUIRED R-20 INSIDE OR OUT

UNDER SLAB INSULATION
 MINIMUM REQUIRED R-10

I DECLARE THAT THE PLANS AND SPECIFICATIONS SUBMITTED
 ARE PREPARED FOR THE CONSTRUCTION OR ALTERATION OF
 THE BUILDING(S)

DATE: _____ SIGNATURE: _____

REVISION DATE 22 / 8 / 2016

2 STOREY BUILDING WITH FULL BASEMENT

SHINGLES: TYPE _____
SHEATHING: TYPE _____ THICKNESS _____

RAFTERS: SIZE _____ SPACING _____ SPAN _____
CEILING JOIST: SIZE _____ SPACING _____ SPAN _____

MANUFACTURED TRUSSES:
MANUFACTURER _____

INSULATION: MINIMUM REQUIRED R-50
VAPOUR BARRIER: TYPE _____
INTERIOR CEILING FINISH: TYPE _____

SIDING: TYPE _____
SHEATHING MEMBRANE: TYPE _____
SHEATHING: TYPE _____ THICKNESS _____
WALL STUDS: HEIGHT _____ SIZE _____
INSULATION: MINIMUM REQUIRED R-24
VAPOUR BARRIER: TYPE _____
INSIDE WALL FINISH: TYPE _____

SUBFLOOR: TYPE _____ THICKNESS _____
FLOOR JOIST: SIZE _____ SPACING _____
SPAN _____
INTERIOR CEILING FINISH: TYPE _____

SIDING: TYPE _____
SHEATHING MEMBRANE: TYPE _____
SHEATHING: TYPE _____ THICKNESS _____
WALL STUDS: HEIGHT _____ SIZE _____
INSULATION: MINIMUM REQUIRED R-24
VAPOUR BARRIER: TYPE _____
INSIDE WALL FINISH: TYPE _____


SUBFLOOR: TYPE _____ THICKNESS _____
FLOOR JOIST: SIZE _____ SPACING _____
SPAN _____
SILL GASKET (REQUIRED)
ANCHOR BOLTS 1/2" @ _____ O.C. (MAX 8FT, 2.4M)

BEAM: SIZE _____
THICKNESS _____ LENGTH _____
HEIGHT _____
POST: SIZE _____ HEIGHT _____
FOOTING (MIN 4 sq.ft.): HEIGHT _____
WIDTH _____

FOUNDATION WALL: THICKNESS _____
HEIGHT _____
DAMP PROOFING TYPE: _____
INSULATION: MINIMUM REQUIRED R-20 INSIDE OR OUT
HEIGHT OF BACKFILL MATERIAL: _____
FOOTING: HEIGHT _____ WIDTH _____
6" MIN. CRUSHED STONE (REQUIRED)
4" MIN. PERFERATED DRAIN TILE (REQUIRED)

SLAB THICKNESS: _____
VAPOUR BARRIER: TYPE _____
FILL MATERIAL: TYPE _____

UNDER SLAB INSULATION MINIMUM REQUIRED R-10

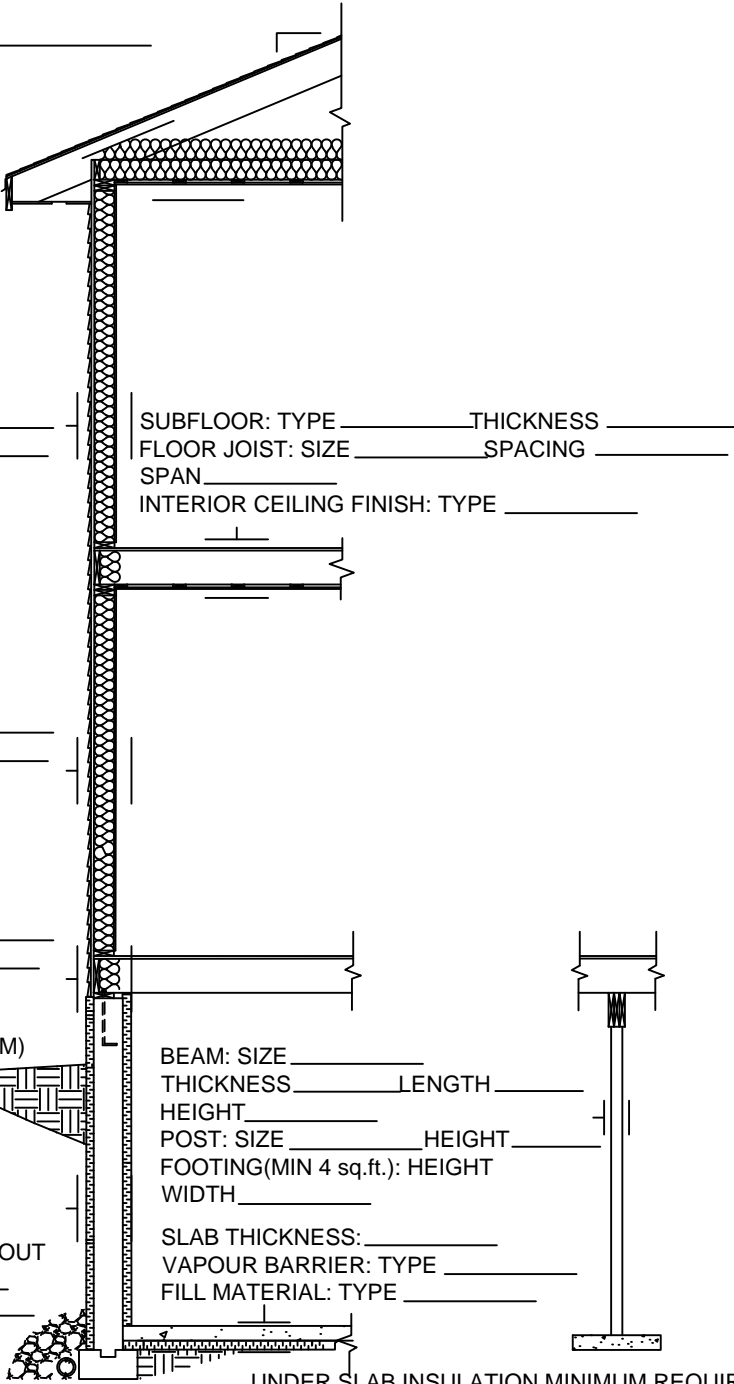

I DECLARE THAT THE PLANS AND SPECIFICATIONS SUBMITTED
ARE PREPARED FOR THE CONSTRUCTION OR ALTERATION OF
THE BUILDING(S)

DATE: _____ SIGNATURE: _____


BUILDING ON STRUCTURAL SLAB HEATED

SHINGLES: TYPE _____
SHEATHING: TYPE _____ THICKNESS _____

RAFTERS: SIZE _____ SPACING _____ SPAN _____
CEILING JOIST: SIZE _____ SPACING _____ SPAN _____

MANUFACTURED TRUSSES:
MANUFACTURER _____

INSULATION: MINIMUM REQUIRED R-50
VAPOUR BARRIER: TYPE _____
INTERIOR CEILING FINISH: TYPE _____

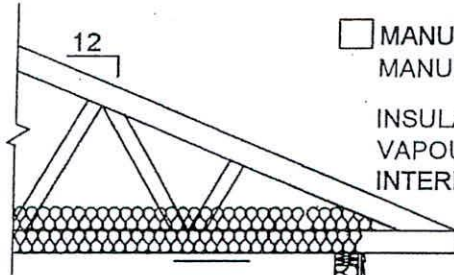

SIDING: TYPE _____
SHEATHING MEMBRANE: TYPE _____
SHEATHING: TYPE _____ THICKNESS _____
WALL STUDS: HEIGHT _____ SIZE _____
INSULATION: MINIMUM REQUIRED R.24
VAPOUR BARRIER: TYPE _____
INSIDE WALL FINISH: TYPE _____

SLAB(MIN 4"): THICKNESS _____
VAPOUR BARRIER: TYPE _____
FILL MATERIAL: TYPE _____

FOUNDATION THICKNESS: 12"
REBAR: _____

UNDER SLAB INSULATION MINIMUM REQUIRED R-12


I DECLARE THAT THE PLANS AND SPECIFICATIONS SUBMITTED
ARE PREPARED FOR THE CONSTRUCTION OR ALTERATION OF
THE BUILDING(S)

DATE: _____ SIGNATURE: _____

PLEASE NOTE: A N.S. PROFESSIONAL ENGINEERED DESIGN WILL BE
REQUIRED FOR ANY COMMERCIAL, HEAVY INDUSTRIAL,
ASSEMBLY, RESIDENTIAL, AND INSTITUTIONAL BUILDING
OR ADDITION CONSTRUCTED ON A SLAB.

REVISION DATE 4 / 4 / 2014

BUILDING ON STRUCTURAL SLAB UNHEATED

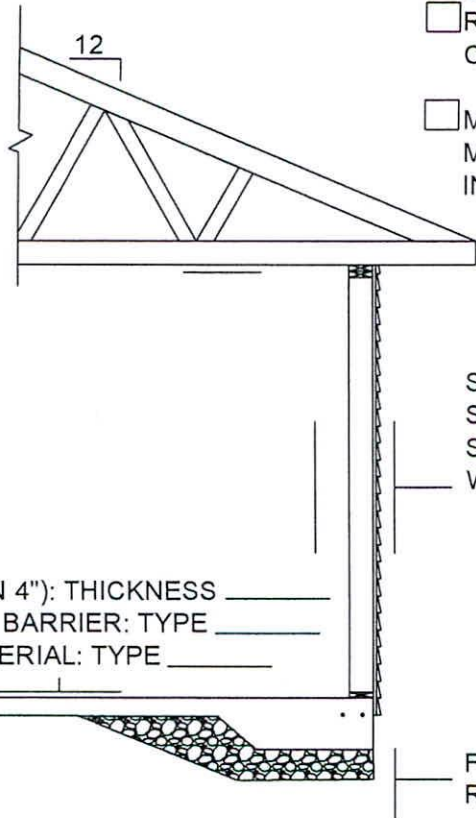

SHINGLES: TYPE _____
 SHEATHING: TYPE _____ THICKNESS _____
 RAFTERS: SIZE _____ SPACING _____ SPAN _____
 CEILING JOIST: SIZE _____ SPACING _____ SPAN _____
 MANUFACTURED TRUSSES:
 MANUFACTURER _____
 INTERIOR CEILING FINISH: TYPE _____

SIDING: TYPE _____
 SHEATHING MEMBRANE: TYPE _____
 SHEATHING: TYPE _____ THICKNESS _____
 WALL STUDS: HEIGHT _____ SIZE _____

SLAB(MIN 4"): THICKNESS _____
 VAPOUR BARRIER: TYPE _____
 FILL MATERIAL: TYPE _____

FOUNDATION THICKNESS: 12"
 REBAR: _____

I DECLARE THAT THE PLANS AND SPECIFICATIONS SUBMITTED
 ARE PREPARED FOR THE CONSTRUCTION OR ALTERATION OF
 THE BUILDING(S)

DATE: _____ SIGNATURE: _____

PLEASE NOTE: A N.S. PROFESSIONAL ENGINEERED DESIGN WILL BE
 REQUIRED FOR ANY COMMERCIAL, HEAVY INDUSTRIAL,
 ASSEMBLY, RESIDENTIAL, AND INSTITUTIONAL BUILDING
 OR ADDITION CONSTRUCTED ON A SLAB.

REVISION DATE 4 / 7 / 2013


1 STOREY BUILDING ON FOOTING AND FROST WALL AND SLAB

SHINGLES: TYPE _____
 SHEATHING: TYPE _____ THICKNESS _____

RAFTERS: SIZE _____ SPACING _____ SPAN _____
 CEILING JOIST: SIZE _____ SPACING _____ SPAN _____

MANUFACTURED TRUSSES:
 MANUFACTURER _____


INSULATION: MINIMUM REQUIRED R-50
 VAPOUR BARRIER: TYPE _____
 INTERIOR CEILING FINISH: TYPE _____

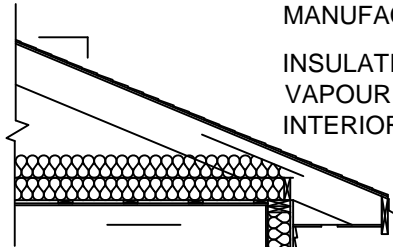

BEAM: SIZE _____ THICKNESS _____
 LENGTH _____ HEIGHT _____
 POST: SIZE _____ HEIGHT _____
 FOOTING(MIN 4 sq.ft.): HEIGHT _____
 WIDTH _____

SIDING: TYPE _____
 SHEATHING MEMBRANE: TYPE _____
 SHEATHING: TYPE _____ THICKNESS _____
 WALL STUDS: HEIGHT _____ SIZE _____
 INSULATION: MINIMUM REQUIRED R-24
 VAPOUR BARRIER: TYPE _____
 INSIDE WALL FINISH: TYPE _____

FLOOR JOIST: SIZE _____ SPACING _____ SPAN _____
 SILL GASKET REQUIRED
 ANCHOR BOLTS 1/2" @ _____ O.C.(MAX 8FT, 2.4M)
 INSULATION: MINIMUM REQUIRED R-10 AT LEAST 2FT BELOW GRADE

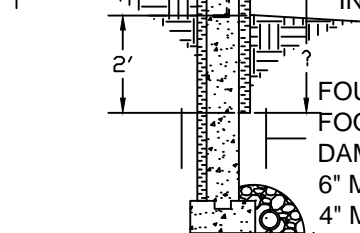

FOUNDATION WALL: THICKNESS _____ HEIGHT _____
 FOOTING: HEIGHT _____ WIDTH _____
 DAMPPROOFING: YES NO
 6" MIN. CRUSHED STONE (IF REQUIRED)
 4" MIN. PERFERATED DRAIN TILE (IF REQUIRED)
 INSULATION: MINIMUM REQUIRED R-10 INSIDE OR OUT

I DECLARE THAT THE PLANS AND SPECIFICATIONS SUBMITTED
 ARE PREPARED FOR THE CONSTRUCTION OR ALTERATION OF
 THE BUILDING(S)

DATE: _____ SIGNATURE: _____

1 STOREY BUILDING ON FOOTING AND FROST WALL

SHINGLES: TYPE _____
 SHEATHING: TYPE _____ THICKNESS _____

RAFTERS: SIZE _____ SPACING _____ SPAN _____
 CEILING JOIST: SIZE _____ SPACING _____ SPAN _____

MANUFACTURED TRUSSES:
 MANUFACTURER _____


INSULATION: MINIMUM REQUIRED R-50
 VAPOUR BARRIER: TYPE _____
 INTERIOR CEILING FINISH: TYPE _____

SIDING: TYPE _____
 SHEATHING MEMBRANE: TYPE _____
 SHEATHING: TYPE _____ THICKNESS _____
 WALL STUDS: HEIGHT _____ SIZE _____
 INSULATION: MINIMUM REQUIRED R-24
 VAPOUR BARRIER: TYPE _____
 INSIDE WALL FINISH: TYPE _____

FLOOR JOIST: SIZE _____ SPACING _____ SPAN _____
 SILL GASKET REQUIRED
 ANCHOR BOLTS 1/2" @ _____ O.C. (MAX 8FT, 2.4M)
 INSULATION: MINIMUM REQUIRED R-31 OVER UNHEATED SPACE

FOUNDATION WALL: THICKNESS _____ HEIGHT _____
 FOOTING: HEIGHT _____ WIDTH _____
 DAMPPROOFING: TYPE _____
 6" MIN. CRUSHED STONE (IF REQUIRED)
 4" MIN. PERFERATED DRAIN TILE (IF REQUIRED)
 INSULATION: MINIMUM REQUIRED R-20 IF HEATED
 SPACE INSIDE OR OUT

BEAM: SIZE _____ THICKNESS _____
 LENGTH _____ HEIGHT _____
 POST: SIZE _____ HEIGHT _____
 FOOTING (MIN 4 sq.ft.): HEIGHT _____
 WIDTH _____

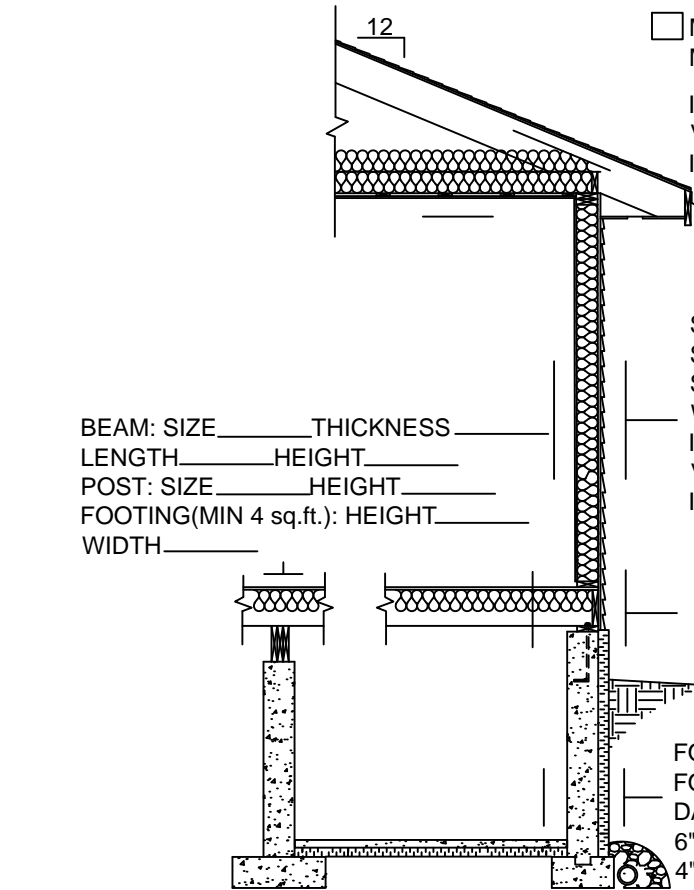

UNDER SLAB INSULATION MINIMUM REQUIRED R-10

I DECLARE THAT THE PLANS AND SPECIFICATIONS SUBMITTED
 ARE PREPARED FOR THE CONSTRUCTION OR ALTERATION OF
 THE BUILDING(S)

DATE: _____ SIGNATURE: _____

REVISION DATE 22 / 8 / 2016


1 STOREY BUILDING ON POSTS

SHINGLES: TYPE _____
 SHEATHING: TYPE _____ THICKNESS _____

RAFTERS: SIZE _____ SPACING _____ SPAN _____
 CEILING JOIST: SIZE _____ SPACING _____ SPAN _____


MANUFACTURED TRUSSES:
 MANUFACTURER _____

INSULATION: MINIMUM REQUIRED R-50
 VAPOUR BARRIER: TYPE _____
 INTERIOR CEILING FINISH: TYPE _____

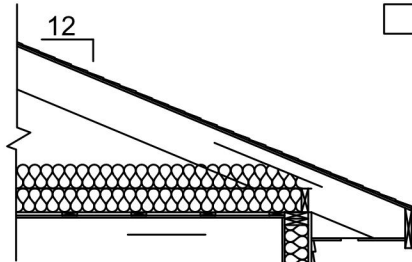

BEAM: SIZE _____ THICKNESS _____
 LENGTH _____ HEIGHT _____
 POST: SIZE _____ HEIGHT _____
 FOOTING (MIN 4 sq.ft.): HEIGHT _____
 WIDTH _____

SIDING: TYPE _____
 SHEATHING MEMBRANE: TYPE _____
 SHEATHING: TYPE _____ THICKNESS _____
 WALL STUDS: HEIGHT _____ SIZE _____
 INSULATION: MINIMUM REQUIRED R-24
 VAPOUR BARRIER: TYPE _____
 INSIDE WALL FINISH: TYPE _____

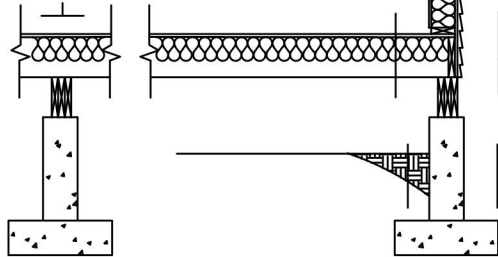

FLOOR JOIST: SIZE _____ SPACING _____ SPAN _____
 INSULATION: MINIMUM REQUIRED R-31

BEAM (MIN. 3 PIECES): THICKNESS _____ LENGTH _____
 POST ANCHOR (REQUIRED)
 POST: SIZE 10" HEIGHT 4'
 FOOTING 2'X2'

TYPE OF PIER CONSTRUCTION: CONCRETE
 WOOD
 OTHER _____
 SCREWPILES


I DECLARE THAT THE PLANS AND SPECIFICATIONS SUBMITTED
 ARE PREPARED FOR THE CONSTRUCTION OR ALTERATION OF
 THE BUILDING(S)

DATE: _____ SIGNATURE: _____

COVERED PORCH ADDITION

SHINGLES: TYPE _____
 SHEATHING: TYPE _____ THICKNESS _____
 RAFTERS: SIZE _____ SPACING _____ SPAN _____
 CEILING JOIST: SIZE _____ SPACING _____ SPAN _____

MANUFACTURED TRUSSES:
 MANUFACTURER _____
 INTERIOR CEILING FINISH: TYPE _____

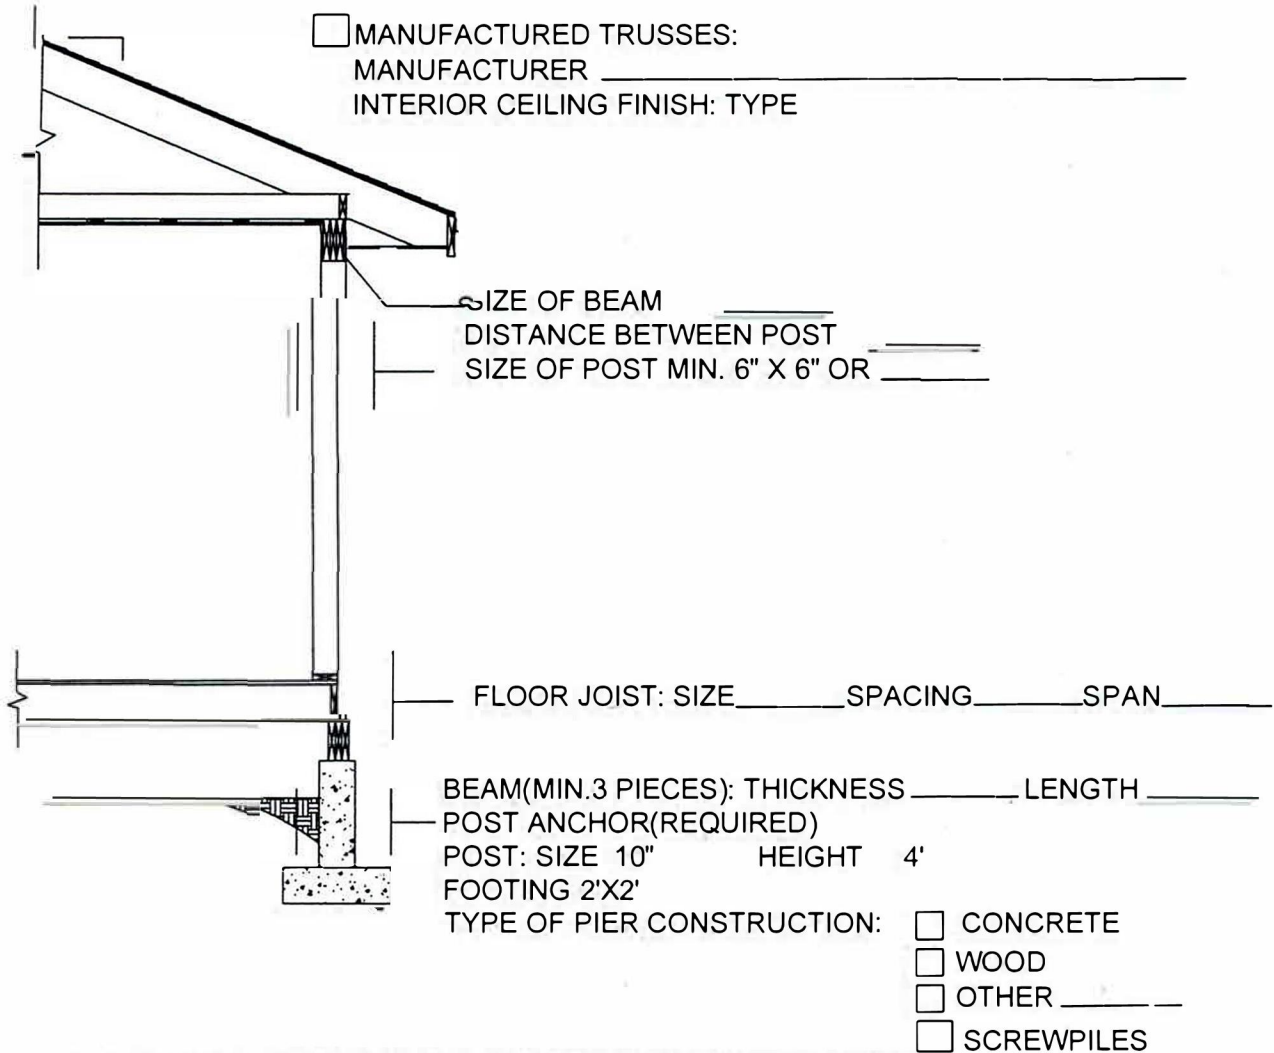

I DECLARE THAT THE PLANS AND SPECIFICATIONS SUBMITTED
 ARE PREPARED FOR THE CONSTRUCTION OR ALTERATION OF
 THE BUILDING(S)

DATE: _____ SIGNATURE: _____

REVISION DATE 10/11/2017